



Loop Detector Installation Manual

1. Plug the loop detector into matching connector on the gate opener control board. Green light blinks. Figure 1.

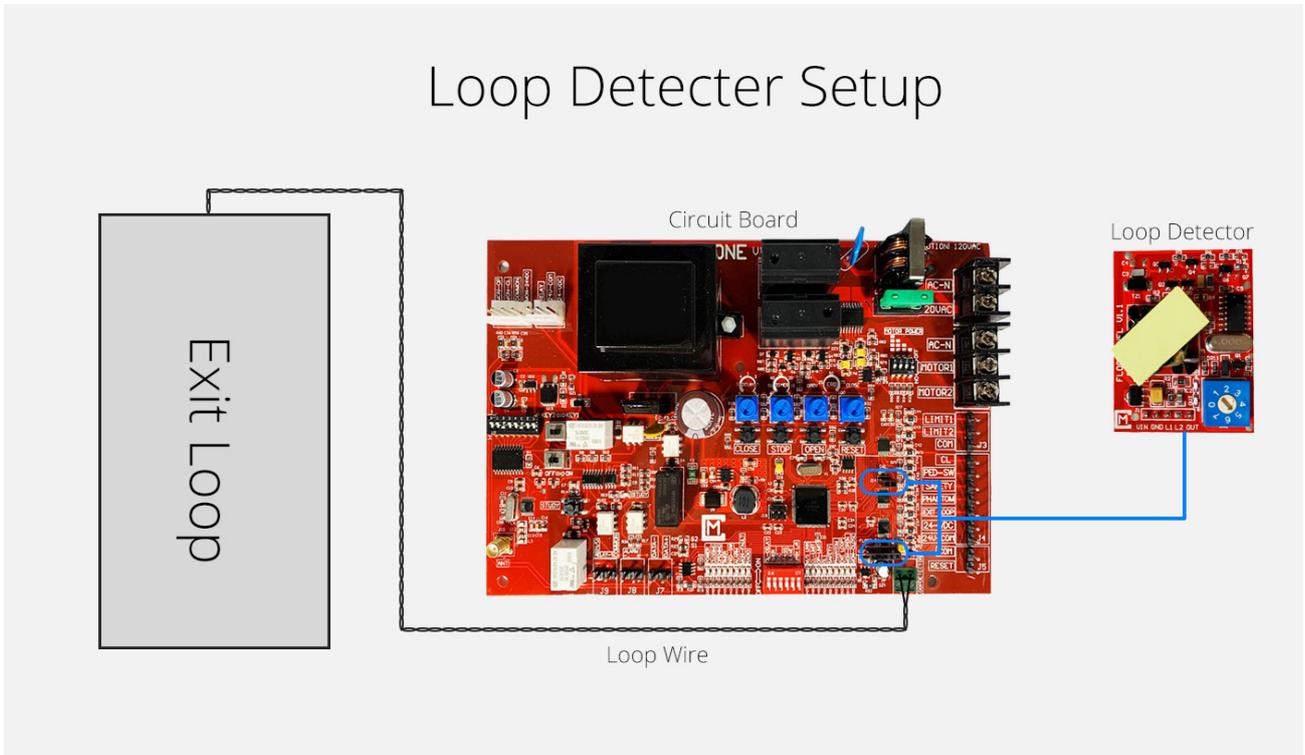


Figure 1

2. Install the loop wire underground, if not already installed. Exit loop should be 16 feet away from gate. Figure 2

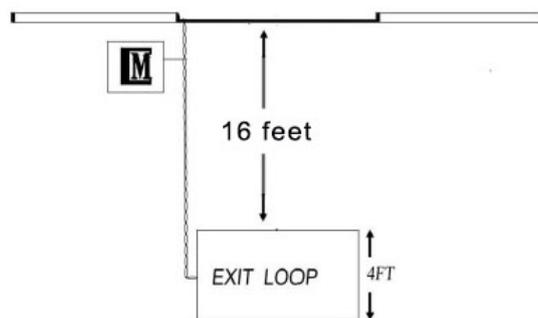


Figure 2

3. Connect loop wire to the terminal on control board. Figure 1
4. Turn Loop sensitivity from 0 to 7, a larger number indicates higher sensitivity.
5. Finished.

Note: If gate opens without an intentional trigger, downgrade the sensitivity until fixed.

